



TFT-LCD MONITOR

Product Information

MODEL NO. : T057Q1D1-3

Date : 2008.11.22 Revision. 1.1

Prepared by : Daniel Tseng

Daniel Tseng, Engineer, Product Development Div.

Approved by : Jackey Chien

Jackey Chien, Director, Product Development Div.

This TFT LCD Monitor is distributed by:



Display Solution AG
Talhofstraße 32a
D-82205 Gilching
GERMANY
Fon +49 (0)8105 / 73 403 - 0
Fax +49 (0)8105 / 73 403 - 79
E-Mail: info@display-solution.com
Internet: www.display-solution.com

This product information is subject to change without any notice.



Records of Revision

Date	Rev. No.	Summary	Page
2007.04.12	1.0	Mass production release	
2007.11.22	1.1	LED Driver Mode Connector/Pinning Information Revised	13/14

This specification data sheet is an intellectual property of PowerView Display Corporation. Any copy, reproduction or modification without written permission of PowerView Display Corporation is not allowed.



Contents	Page
1.0 Handling Precautions	4
2.0 General Description	5
2.1 General Application	5
2.2 Main Features	5
2.3 General Information	5
2.3.1 Display Characteristics	5
2.3.2 Mechanical Dimensions	6
3.0 Absolute Maximum Ratings	6
3.1 Absolute Ratings of Environment Requirement	6
3.2 Electrical Absolute Ratings	7
3.2.1 TFT-LCD Module	7
3.2.2 LED Backlight Module	7
4.0 Optical Characteristics	8
5.0 Electrical Characteristics	10
5.1 AC Timing Characteristics	10
5.2 DC Characteristics	10
5.2.1 TFT-LCD Module	10
5.2.2 DC-DC for LED Backlight	11
5.3 Input Terminal Pin Assignment	11
5.3.1 Signal Input Interface	12
5.3.2 LED Backlight Power Input Interface	12
5.3.3 Touch Panel Input Interface	13
5.4 Color Data Reference	13
5.5 Input Timing Chart	15
6.0 Pixel Format Image	16
7.0 Outline Dimensions	16
8.0 Labeling, Packaging & Others	18
9.0 General Notices	19
9.1 Storage	19
9.2 Operation & Others	19



1.0 Handling Precaution

- 1.) Handle with care. Pay attention not to press or scratch the surface of the monitor, especially the polarizer. Do not twist or bend the monitor. It may cause un-recoverable damage .
- 2.) Do not drop or bump the monitor since this monitor contains fragile glass components. Breakage of this monitor might cause leakage of the liquid crystal sealed inside the monitors. Do not touch the liquid crystal liquid in case of leakage. Flush with massive water immediately in case of contact with your skin with liquid crystal fluid and call for doctor for immediate medical treatment.
- 3.) Be sure to turn off power supply while plug or un-plug the power input connector.
- 4.) Clean up the polarizer only with soft solvent if necessary. The desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane. Do not use Ketone type materials (ex. Acetone), Ethyl alcohol, toluene, Ethyl acid or Methyl chloride. It will permanently damage the polarizer due to chemical reaction.
- 5.) Wipe off fluid drop immediately to prevent from possible discoloration or spots on the polarizer.
- 6.) Do not twist nor bend the monitor structure, even momentarily. Bending or twisting torque may likely damage the internal components of the monitor.
- 7.) The cold cathode fluorescent lamp in LCD contains small amount of mercury (Hg). Please refer to the design specification for application and the local regulations and environmental laws for disposal purpose.
- 8.) Protect the monitor from static environment to prevent from damage to the CMOS gate array IC.



2.0 General Description

T057Q1D1-3 is a 5.7 inch color active matrix TFT LCD monitor with **TOUCH SCREEN** integrated and excellent display performance driven by a pure **DIGITAL** CMOS interface. This monitor supports true **QVGA**, 320(H) x RGB x 240(V), stripe screen format and 262,144 full colors (RGB 6 bits data). It uses **LED**(Light Emitting Diodes) as its luminous source and is able to reach 410(typ. after touch screen) nits brightness with a good power efficiency comparing to conventional backlight under long life time standard. This makes T057Q1D1-3 very suitable for the industrial or outdoor applications in which power consumption is a concern. In addition, the **LED driving circuitry** is built-in in the module. With its **ALL-IN-ONE** functionality, T057Q1D1-3 is a designer friendly and cost effective product.

2.1 General Applications

- Mobile Display Terminal for GPS, Gaming, Video, Industrial and Medical Applications

2.2 Main Features

- 5.7" True QVGA TFT LCD with **Touch Screen**
- Long Life **LED Backlight** with Good Brightness
- Wide Operational Temperature with Stable Brightness Performance
- Super Wide Viewing Angle
- Pure Digital CMOS Interface
- Built-in DC-DC
- Built-in LED Driver Circuitry
- Drop-in Compatible with Major Industrial 5.7" TFT LCD

2.3 General Information

2.3.1 Display Characteristics

Item	Specification	Unit	Note
Display Area	115.2(H) x 86.4(V)	mm	5.7"
Driver Element	a-Si TFT Active Matrix	-	-
Number of Pixels	320(H) x 240(V)	pixel	QVGA
Pixel Arrangement	RGB Vertical Stripe	-	-
Dot Pitch	0.120(H) x 0.360(V)	mm	Dot
Display Mode	Normally White	-	-
Viewing Angle	140/120	degree	6 o'clock
Signal Interface	Digital RGB 18 bits		262K colors



2.3.2 Mechanical Dimensions

Item		Min.	Typ.	Max.	Unit	Note
Dimension	Horizontal	-	144.0	-	mm	±0.5 mm
	Vertical	-	104.6	-		±0.5 mm
	Depth	-	14.4	-		±0.2 mm
Weight		-	270	-	g	±5g

3.0 Absolute Maximum Ratings


3.1 Absolute Ratings of Environment Requirement

Item	Symbol	Min.	Max.	Unit	Note
Storage Temperature	Tstg	-40	+90	°C	(1)
Operation Temperature (Ambient Temperature)	Topr	-30	+85	°C	(1)

Note (1) Temperature and relative humidity range are shown in the figure below.

95% RH Max. ($40^{\circ}\text{C} > T_a$)

Maximum wet – bulb temperature at 39°C or less. ($T_a > 40^{\circ}\text{C}$) No condensation.

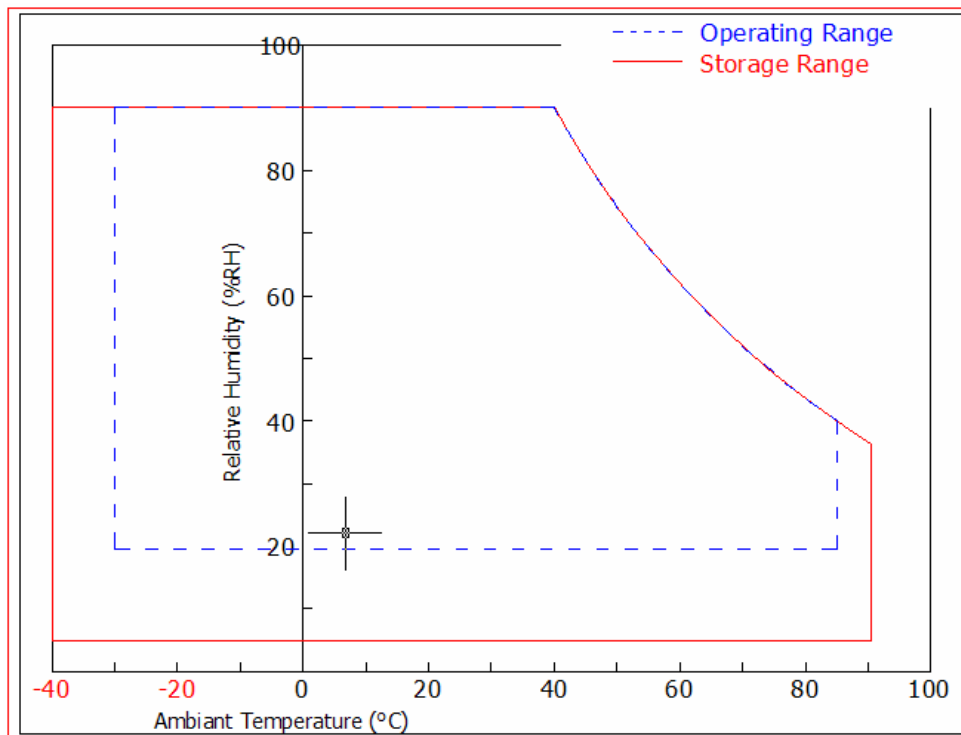



3.2 Electrical Absolute Ratings

3.2.1 TFT-LCD Module

(Ta=25±2°C), Vgg=GND=0V)

Item	SYMBOL	Min.	Max.	UNIT	NOTE
Power Supply Voltage	V _{DD}	-0.3	4.0	V	(1),(2)
Input Voltage	V _{i1}	-0.3	5.5	V	(1),(2),(3)

3.2.2 LED Backlight Module

Item	SYMBOL	MIN	MAX	UNIT	NOTE
Power Supply Voltage	V _{BL}	-0.3	15	V	(1),(2)
Input Voltage	V _{i2}	-0.3	5.5	V	(1),(2),(4)

Note (1) Within operating temperature

Note (2) Permanent damage to the device may occur if maximum values are exceeded.

Functional operation should be restricted to the conditions described under normal operating conditions.

Note (3) For all pins except power and ground pins

4.0 Optical Characteristics

The following items are measured under stable conditions in a dark room or equivalent state.

* Measuring Equipment: BM-5A, PR-650

($V_{DD}=3.3V$, $f_V=60Hz$, $f_H=15.734KHz$, $T_a=25\pm 2^\circ C$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio	CR		300	500	-		BM-5A (4)-[1]
Response Time at 25°C	Rising	T_R	-	15	30	ms	BM-5A (5)
	Falling	T_F		35			
Luminance	Y_L	Normal Angle	-	410	-	Cd/m ²	BM-5A (4)-[2]
Color Chromaticity	W_X			-			
	W_Y			-			
Viewing Angle	Hor.	θ_L	CR \geq 10(at center point)	70		Degree	BM-5A (7)
		θ_R		70			
	Ver.	θ_H		50			
		θ_L		70			


Note (1) The optical characteristics is measured with backlight.

Note (2) If product is exposed to high temperatures for extended time, there is a possibility of the polarizer file damage which could degrade the optical characteristics.

Note (3) Test Equipment Setup


After leaving the panel alone at a given temperature for 30 minutes under a stable condition, the measurement should be executed. Measurement should be executed in a stable, windless and dark room over 30 minutes after the backlight is lighted up. The measuring point should be at the center of screen.

-Environment condition : $T_a=25\pm 2^\circ C$

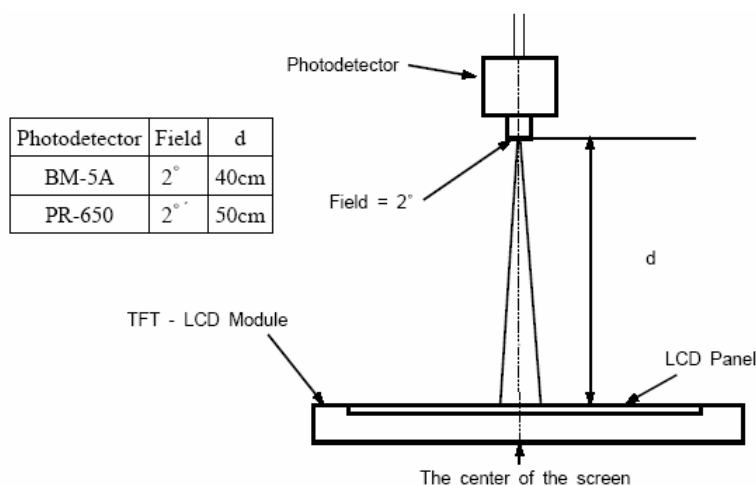

Note (4) Definition of Contrast Ratio, Luminance

ACTIVE AREA (H:101.76mm/ V:76.36mm)

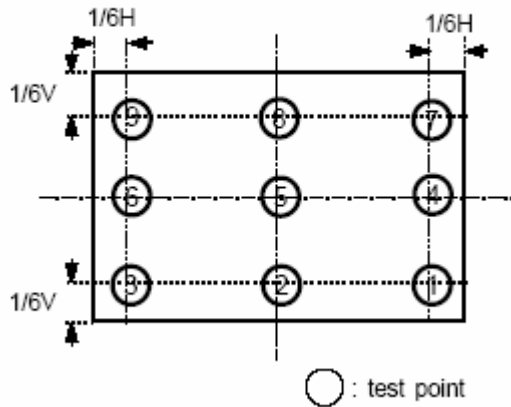

[1] Definition of Contrast Ratio (CR) : Ratio of gray max (Gmax), gray min (Gmin) at 9 points.


$$C/R = G_{max}/G_{min}$$

G_{max} : Luminance with all pixels white

G_{min} : Luminance with all pixels black

[2] Definition of Luminance : measure the luminance of white at center point.


Note (5) Definition of Response Time : Sum of T_r and T_f .

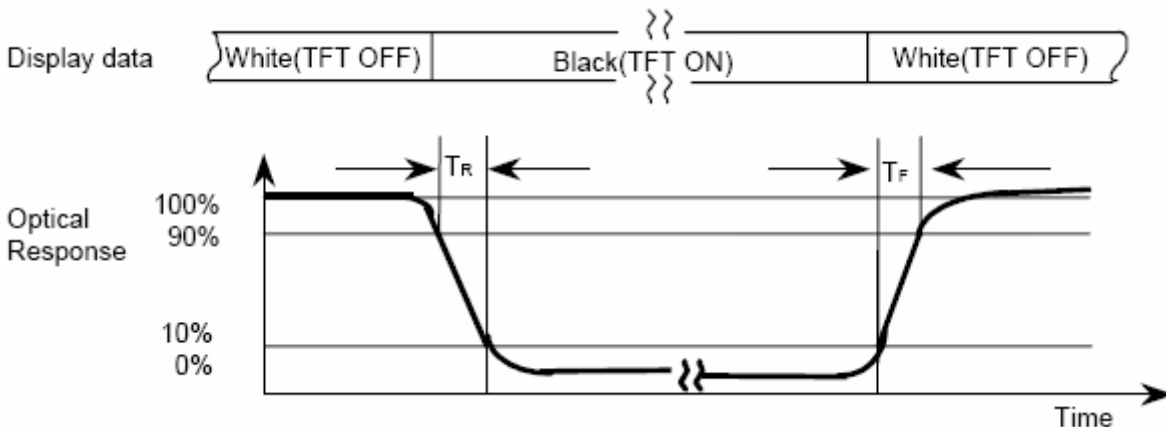

Note (6) Definition of Color Chromaticity (CIE 1931), (Backlight : ON) :

Color coordinate of white at the center point

Note (7) Definition of Viewing Angle : Viewing angle range (CR≥10)

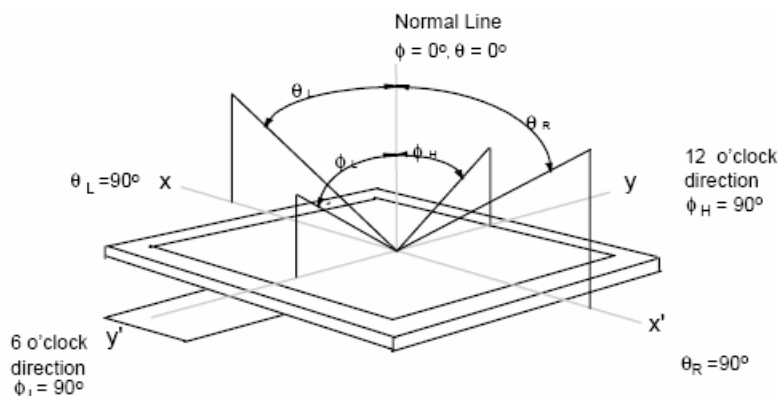

5.0 Electrical Characteristics

5.1 AC Timing Characteristics


Item	Symbol	Min.	Typ.	Max.	Unit	Note
Clock Frequency	F_{ck}	5.5	6.25	7	MHz	
Clock Duty Ratio	$T_{ch}/(T_{ch}+T_{cl})$	40	50	60	%	
Hsync Period	T_h	360	400	450	clk	
	τ_h	50	63.6		μs	$\tau_h = F_{ck} \times T_h$
Hsync Pulse Width	T_{hw}	2	96	200	clk	
Vsync Period	T_v	251	262	280	T_h	
	τ_v	16.1	16.6	17.1	ms	$\tau_v = \tau_h \times T_v$
Vsync Pulse Width	T_{vw}	2	-	34	T_h	
Hsync/Vsync Phase Shift	T_{vpd}	0	-	-	clk	
Horizontal Display Start	T_{he}	-	(69)	-	clk	
Vertical Display Start	T_{ve}	-	7	-	T_h	
Hsync Clock Shift	T_{hc}	10	-	-	ns	
Data Setup Time	T_{ds}	5	-	-	ns	
Data Hold Time	T_{dh}	10	-	-	ns	

5.2 DC Characteristics

5.2.1 TFT-LCD Module

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage	V_{DD}	3.0	3.3	3.6	V	(1)
	I_{DD}	-	220	260	mA	(2)(4)
Permissive Input Ripple Voltage	V_{RF}	-	-	100	mV _{P-P}	$V_{DD} = +5V$
Input Voltage (Low)	V_{IL}	0	-	0.3	V	(3)
Input Voltage (High)	V_{IH}	0.7	-	5.5	V	(3)
Input Current (Low)	I_{IL}	-	-	10	μA	(3)
Input Current (High)	I_{IH}	-	-	10	μA	(3)

Note (1) VDD Power-On condition :

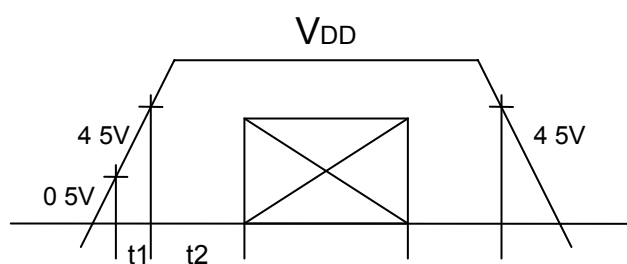

$$0 < t1 \leq 20 \text{ ms}$$

$$0 < t2 \leq 50 \text{ ms}$$

$$t3 \leq 1 \text{ s}$$

Note (2) Conditions for current consumption :



8 Gray Scale Pattern, $V_{CC}=5.0V$, $f_H=15.3K$, $f_V=58.4Hz$, $f_{CLK}=6.0MHz$

Note (3) CLK, Hsync, Vsync, R0~R5, G0~G5, B0~B5

Note (4) LED current is included.

5.2.2 DC-DC for LED Backlight

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage	V_{BL}	9.0	12.0	13.2	V	
	I_{BL-max}	-	(193)	475	mA	(3)
	I_{BL-min}	-	(50)	110	mA	(2)
Operation Life Time	Hr	50,000			Hours	(1)-(2)

Note (1) $V_{BL} = 12V$, using the Mode 2 of LED control scheme and $V_{DIM} = 0V$ to get the maximum brightness.

Note (2) Maximum Brightness : 100% Full Brightness at $V_{DIM} = 5 V$

Note (4) Output impedance of the Vdim circuit at customer's board: Max. 1K ohm

5.3 Input Terminal Pin Assignment

5.3.1 Signal Input Interface

33pin 0.5mmpitch FFC/FPC Type : Kyocera Elco/08-6210-033-340-800, Hirose FH12-33S-0.5SH

Pin No	Symbol	Description	Remark
1	GND	Ground	-
2	CLK	Data Clock	-
3	Hsync	Horizontal Sync.	-
4	Vsync	Vertical Sync.	-
5	GND	Ground	-
6	R0	Red Data (LSB)	-
7	R1	Red Data	-
8	R2	Red Data	-
9	R3	Red Data	-
10	R4	Red Data	-
11	R5	Red Data (MSB)	-
12	GND	Ground	-
13	G0	Green Data (LSB)	-
14	G1	Green Data	-
15	G2	Green Data	-
16	G3	Green Data	-
17	G4	Green Data	-
18	G5	Green Data (MSB)	-
19	GND	Ground	-
20	B0	Blue Data (LSB)	-



21	B1	Blue Data	-
22	B2	Blue Data	-
23	B3	Blue Data	-
24	B4	Blue Data	-
25	B5	Blue Data (MSB)	-
26	GND	Ground	-
27	ENA	Data Enable	-
28	V _{DD}	Power Supply (+3.3V)	-
29	V _{DD}	Power Supply (+3.3V)	-
30	NC	No Connection	-
31	NC	No Connection	
32	NC	No Connection	
33	GND	Ground	

5.3.2 LED Backlight Power Input Interface

Mode 1 Connector: 1.25mm pitch Hirose P/N: DF13-5P-1.25DSA20 (Matching CN:DF13-5S-1.25C)

Pin No.	Symbol	Description	Remark
1	V _{BL}	Power Supply for LED Driver	
2	V _{EN/DIM}	LED Enable & Dimming Control Input	Note 1
3	GND	Connect this pin to GND at this mode	
4	GND	Ground Pin for LED Driver	
5	GND	Ground Pin for LED Driver	

Note 1 : The “Enable & Dimming Control” of the LED driver shares the same pinning. The LED backlight will turn on when the input voltage of this pin exceeds +0.6V. The LED current/brightness will be adjustable by applying an analog voltage between +0.8 ~ +1.3V(Max. Brightness).

Mode 2:

Pin No.	Symbol	Description	Remark
1	V _{BL}	Power Supply for LED Driver	
2	V _{EN}	LED Enable Control Input	Note 1
3	V _{DIM}	Dimming Control Input	Note 2
4	GND	Ground Pin for LED Driver	
5	GND	Ground Pin for LED Driver	

Note 1 : Disable V_{EN}<0.6 V, Enable V_{EN}>1.6 V

Note 2 : Max Brightness V_{DIM} : 0V, Min Brightness V_{DIM} : 2V (≈ 0 Nit)



Mode 3:

Pin No.	Symbol	Description	Remark
1	V _{BL}	Power Supply for LED Driver	
2	V _{EN/DIM}	PWM Control Pulse Input	Note 1, 2
3	GND	Connect this pin to GND at this mode	Note 3
4	GND	Ground Pin for LED Driver	
5	GND	Ground Pin for LED Driver	

Note 1: Valley of PWM Pulse V_{PWM} < 0.6 V, Peak of PWM Pulse V_{PWM} > 1.8 V

Note 2: The frequency of each completed PWM cycle: 100~300 Hz

Note 3: The "DIM" pin should be connected to GND in order to get the full brightness.

5.3.3 Touch Panel Input Interface

Matching Connector : 6915-04

MFGR : Entery Industrial Co., Ltd., Taiwan

Touch Panel Pin No.	Assignment	Remark
1	X1	Film Electrode
2	Y1	Glass Electrode
3	X2	Film Electrode
4	Y2	Glass Electrode

Item	Description
Type	4-wire resistance type
Rate Voltage	DC 7V max.
Resistance	X(Film) : 300~950Ω Y(glass): 200~700Ω
Linearity	X: ±1.5% max Y: ±1.5% max
Insulation Resistance	10MΩ min. (DC 25V)

5.4 Color Data Reference

The below table is about nput signal, Basic display colors and gray scale of each color.

0 : Low Level Voltage 1 : High Level Voltage


Each basic color can be displayed in 64 gray scales from 6 bit data signals. With the combination of total 18 bit data signals, the 262,144 color display can be achieved on the screen.

Please see the next page




	Colors & Gray Scale	Data Signal																		
		Gray Scale	R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	B4	B5
Basic Color	Black	-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	-	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Green	-	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Cyan	-	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	-	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	-	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	-	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	-	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of Red	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	GS1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	GS2	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	↓				↓					↓						↓			
	↓	↓				↓					↓						↓			
	Brighter	GS61	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	↓	GS62	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red	GS63	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale of Green	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	GS1	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
	Darker	GS2	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
	↑	↓				↓														
	↓	↓				↓														
	Brighter	GS61	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0
	↓	GS62	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0
	Green	GS63	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Gray Scale of Blue	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	GS1	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	Darker	GS2	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
	↑	↓																		
	↓	↓																		
	Brighter	GS61	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1
	↓	GS62	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	Blue	GS63	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

5.5 Input Timing Chart

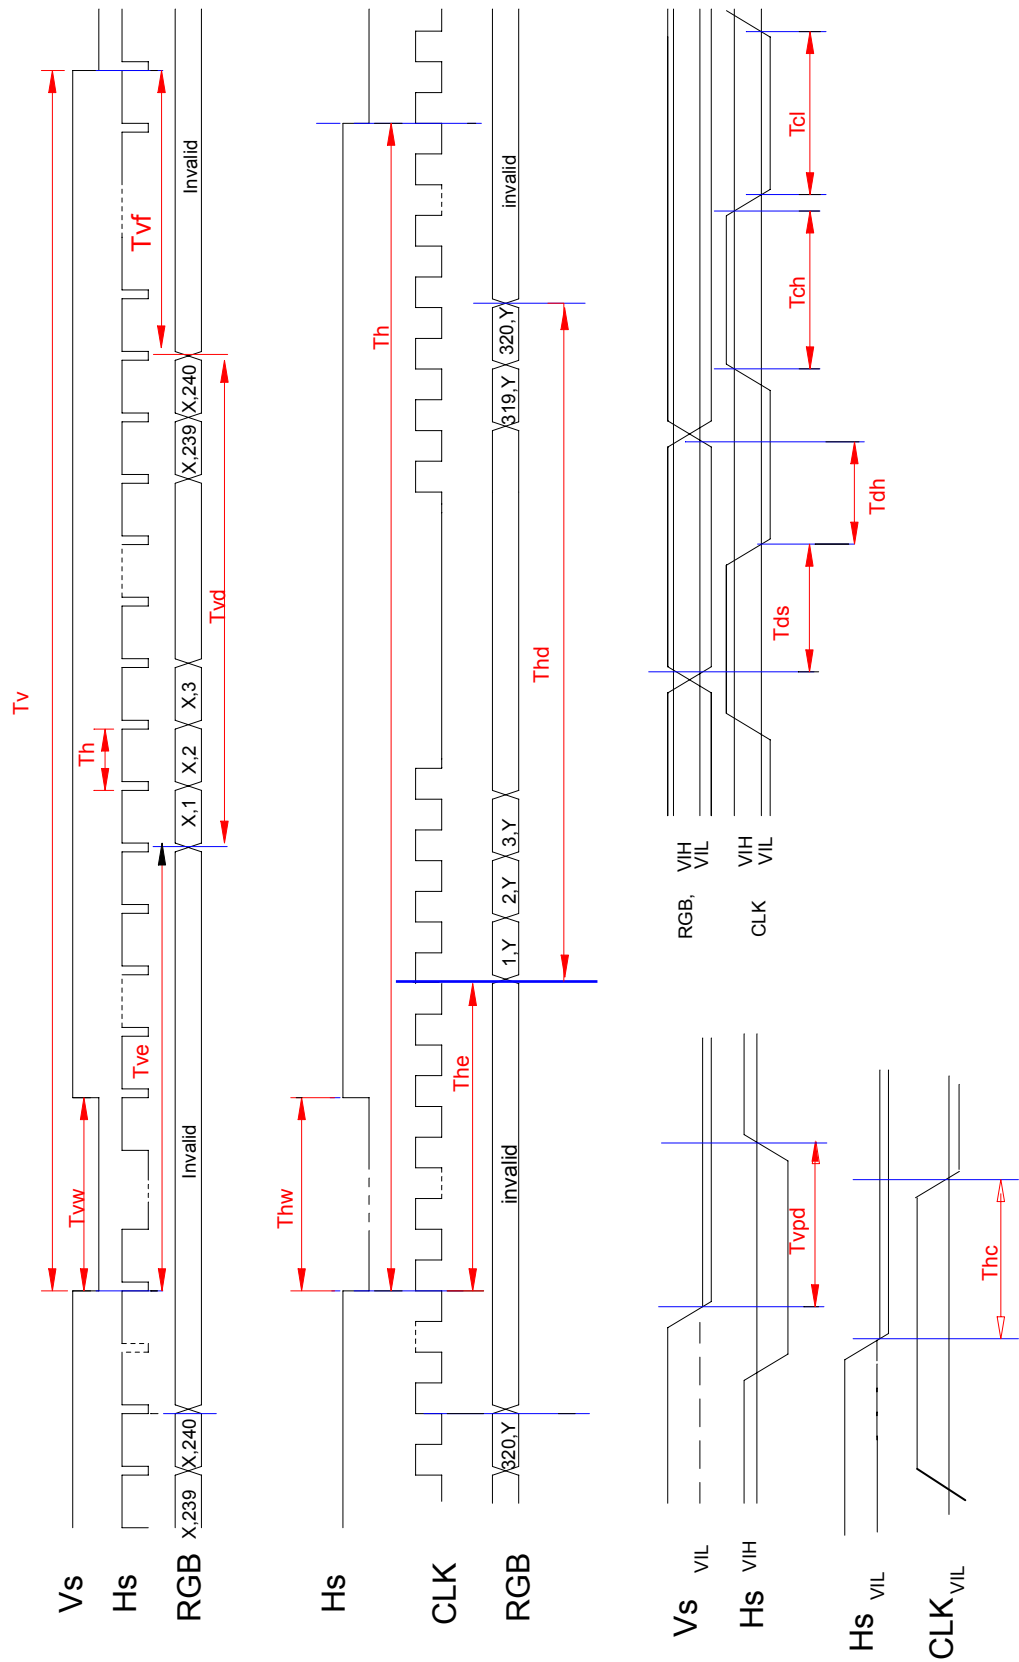

6.0 Pixel Format


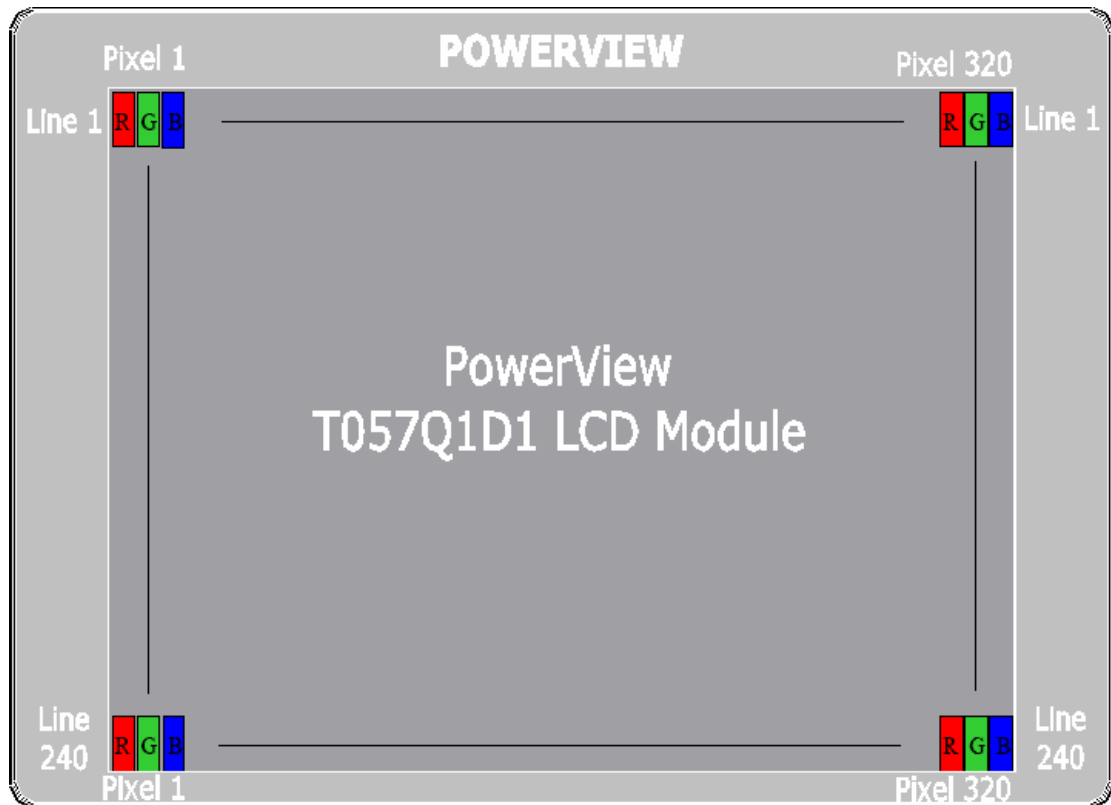


7.0 Outline Dimensions

7.1 Monitor Outline Dimensions



- Please refer to the next page

Notes:
1.General tolerance $\pm 0.5\text{mm}$

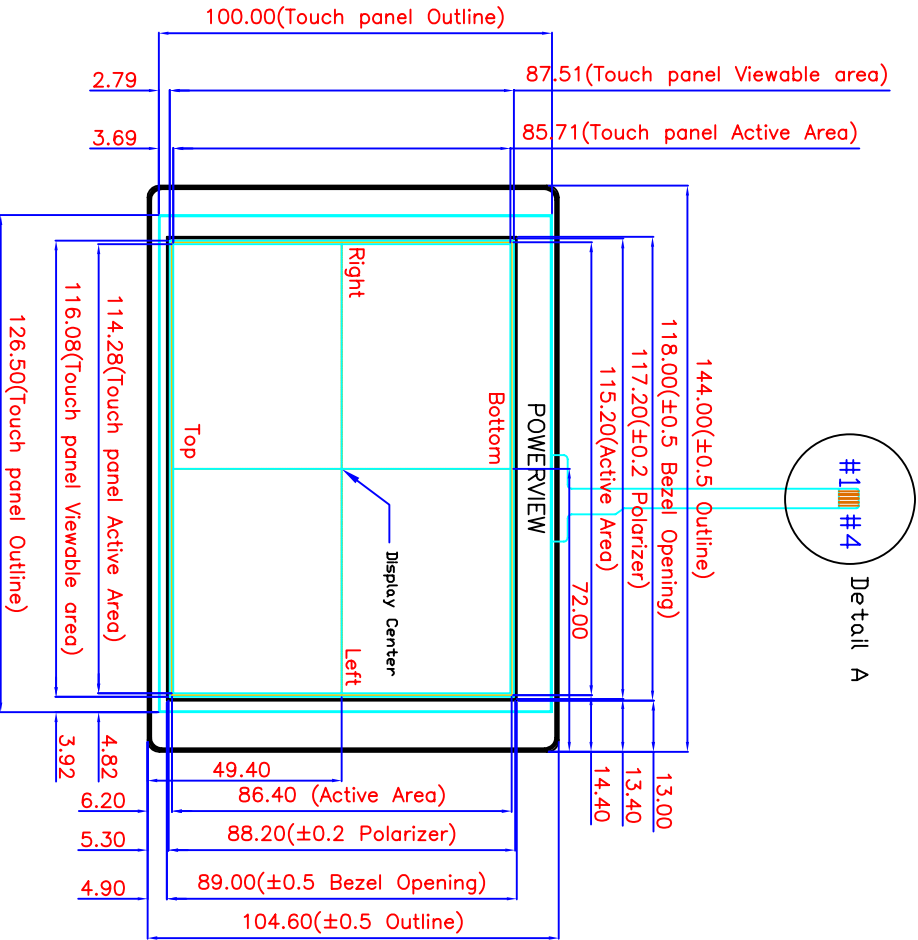


#1 #4

Detail A

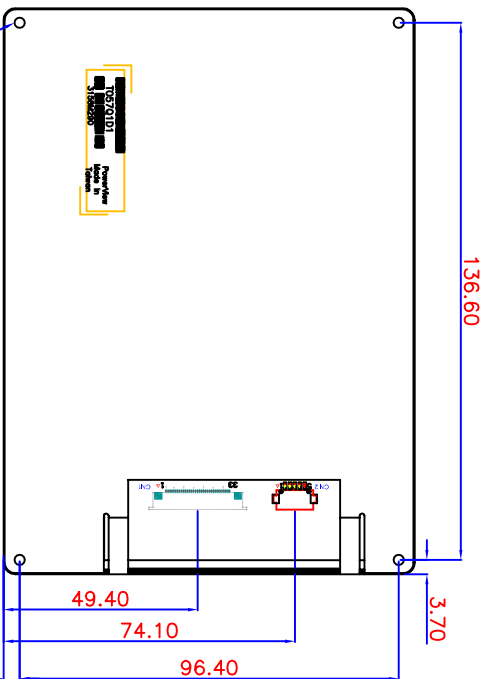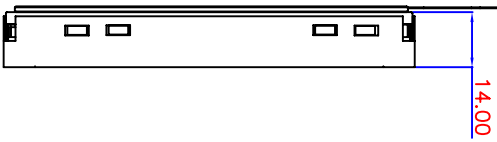


Detail A



Touch Panel PIN No.	Assignment
1	X1
2	Y2
3	X2
4	Y1

X : Film electrode
Y : Glass electrode




Fitting screw : 3.0 tapping screw
4- $\phi 2.6$ depth 5.0mm torque 0.3 ± 0.05 N.m

No.	Connector Type
1	CNI Hirase FH12-3SS-0.5SH(S) compatible
2	CNZ Hirase DF13-9P-1V20 compatible

8.0 Labeling, Packaging & Others

* Labeling

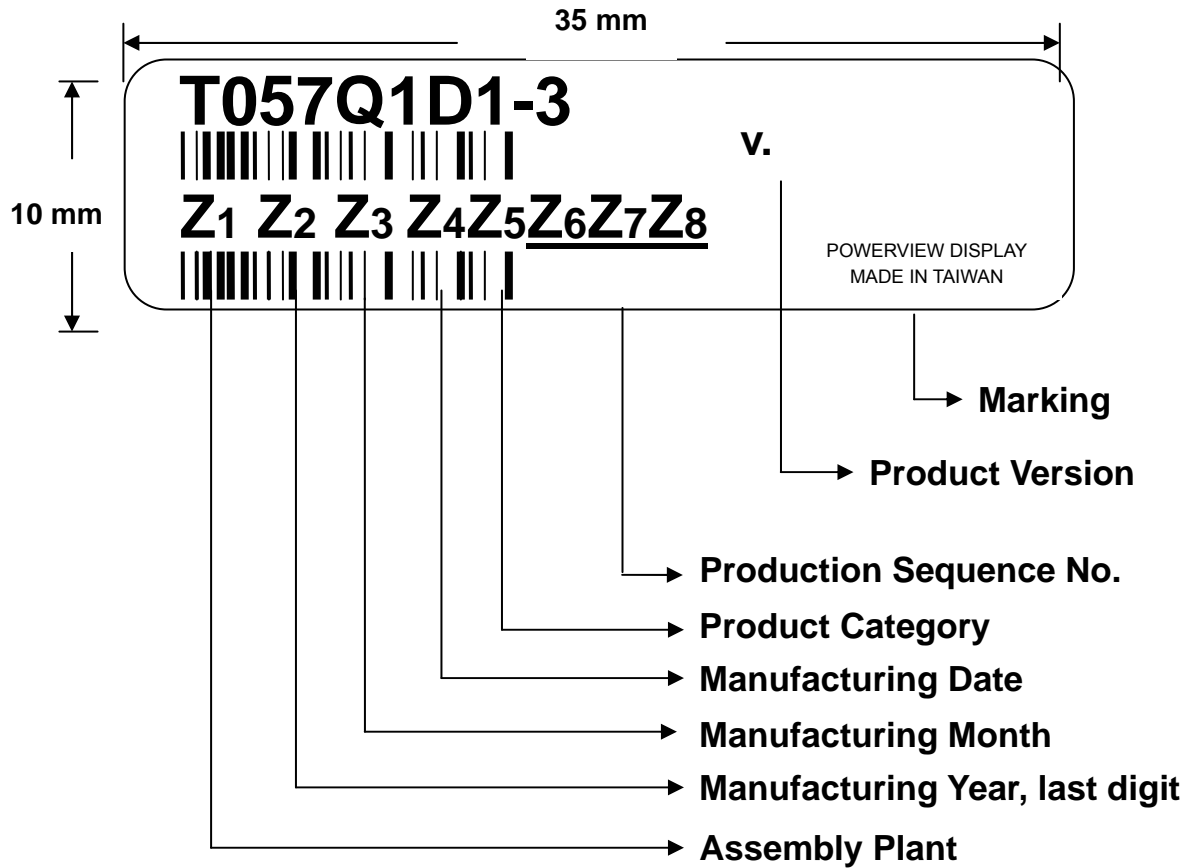

* Packaging

- TBD

* Others



9.0 General Notice

9.1 Storage

- (a) Do not leave the panel in high temperature, and high humidity for a long time.
It is highly recommended to store the module with temperature from 0 to 35°C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD module in direct sunlight.
- (c) The module shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during the storage.

9.2 Operation

- (a) Do not connect, disconnect the module in the "Power On" condition.
- (b) Power supply should always be turned on/off by the item 3.2 "Electrical Absolute Ratings"

* Others

- (a) The liquid-crystal is deteriorated by ultraviolet rays. Do not leave it in direct sunlight and strong ultraviolet rays for many hours.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. (the supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)
Otherwise the panel may be damaged.
- (d) If the panel displays the same pattern continuously for a long period of time, it can be the situation when the image "Sticks" to the screen.
- (e) This panel has its circuitry FPC on the bottom side and should be handled carefully in order not to be stressed.